

DESIGN CONCEPT OF DIRECT-DRIVE MANIPULATORS USING RARE-EARTH DC TORQUE MOTORS

Haruhiko Asada and Takeo Kanade

Robotics Institute
Carnegie-Mellon University
Pittsburgh, Pennsylvania 15217

Abstract

A direct-drive robotic manipulator (CMU DD Arm) is being developed at Carnegie-Mellon University. This paper describes the design concept and theory of this new mechanical arm based on the direct-drive method using rare-earth DC torque motors. Because these motors have high torque, light weight and compact size, we can construct robots with far better performance than those presently available. For example, we can eliminate all the transmission mechanisms between the motors and their loads, such as reducers and chain belts, and construct a simple mechanism (direct-drive) where the arm links are directly coupled to the motor rotors and stators. This elimination can lead to excellent performance: no backlash, low friction, low inertia, low compliance and high reliability.

1. Introduction

Present electrically powered manipulators are still far inferior to human arms and unsatisfactory for many applications in terms of speed, accuracy and versatility. One of the reasons for this poor performance comes from the transmission mechanisms, such as gear trains, lead screws, steel belts, chains and linkages, which are used to transmit power from the motors to the load and to increase the driving torque. The following problems result from having complicated transmission mechanisms:

- Dynamic response is poor because of the heavy weight and/or high compliance of the transmission.
- Fine movements and pure torque control are difficult because of the relatively large friction and backlash at the transmission.
- Additional complicated mechanisms for minimizing the backlash are necessary and they need careful adjustment and regular maintenance.

One of the main reasons for using a transmission mechanism with a high gear reduction ratio is that the conventional servo motors provide rather small torque and high speed. Recently, however, high-torque and low-speed motors using new rare-earth magnetic materials (eg. samarium cobalt) have been developed and are becoming available for industrial use [2] [3]. Since the maximum magnetic energy product is 3 to 10 times larger than with a conventional ferrite or alnico magnet, the rare-earth DC motors have a high output torque, low speed, light weight and compact body. They are suited for the manipulator drive and will allow elimination of the transmission mechanism.

In this paper, we discuss a manipulator where all the joint axes are directly coupled to rotors of rare-earth magnet DC torque motors. First a basic configuration of direct-drive manipulators is shown. Second, we present a design theory for direct drive manipulators by using a simple kinematic model. We then find an arm structure most suitable for direct drive. Finally, we describe a direct-drive manipulator developed at Carnegie-Mellon University, and verify the theoretical result

2. Configuration of Direct-Drive Manipulators

Basically, a direct-drive manipulator consists of a series of active joints whose typical construction is shown in Figure 1. The inner and outer cases are connected to the other joints by connecting links. The motor illustrated is a DC torque motor which consists of a rotor, a stator and a brush ring. The stator and the brush ring are installed in the inner case, while the rotor is directly coupled to the outer case without any transmission mechanism. Some variations are possible in the joint mechanism. For example, the stator can be attached to the outer case, and the rotor to the inner case. Also, the joint axis can be parallel to the connecting links. In any case, the joint has a simple structure with all the components attached directly to the inner and outer cases.

Since the direct drive method eliminates all the transmission mechanisms and since the load is directly coupled to the actuator output, a direct-drive manipulator is essentially free from the problems which have been caused by the transmission mechanisms: backlash is essentially removed, and compliance is almost zero except at the connecting links. Slight Coulomb friction can exist, but only at the bearings supporting the joint axis. Because of its simple structure, a direct-drive manipulator is composed of a much smaller number of mechanical parts. This is another important advantage of direct drive, because it potentially contributes to improve the reliability of the manipulator and to make it free from complex maintenance or readjustment

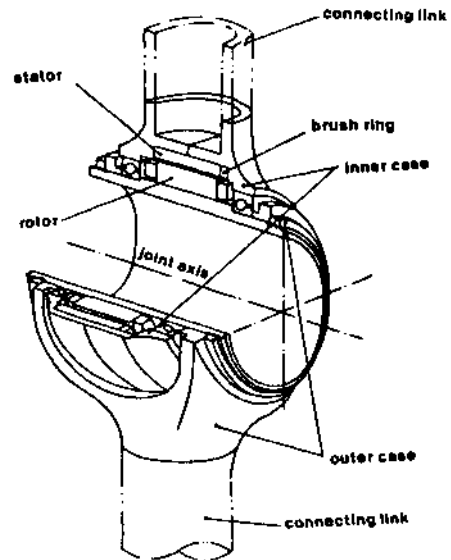


Figure 1: A direct drive joint

Table 1: Weights of motors for all pivotal joints

$\bar{\alpha} = 0.1$

motor weight $\bar{\beta}$	\bar{M}_1	\bar{M}_2	\bar{M}_3	\bar{M}_4	\bar{M}_5	\bar{M}_6	total ($\sum \bar{M}_i$)
1	1.10	3.61	10.61	30.12	86.09	246.04	378.47
0.5	0.65	1.60	3.44	7.57	16.50	35.93	66.48
0.25	0.28	0.58	1.33	2.44	4.38	7.82	17.92

In this formula, $\bar{\alpha}$, \bar{M}_i and $\bar{\beta}$ are made dimensionless by using link length l , maximum load M_0 and acceleration of gravity g .

$$\bar{\beta} = \beta l g, \quad \bar{\alpha} = \frac{l}{g} \alpha, \quad \bar{M}_i = \frac{M_i}{M_0} \quad (7)$$

Table 1 shows \bar{M}_i 's for $\bar{\alpha} = 0.1$ and $\bar{\beta} = 1, 0.5, \text{ and } 0.25$. The joint mass increases exponentially with the joint number. When $\bar{\beta} = 1$, the total arm weight is about 380 times heavier than that of an external object that the arm can carry. If $\bar{\beta}$ becomes 1/2, the total arm weight is drastically reduced to 1/6. The last joint, \bar{M}_6 is reduced as much as 1/7. Thus small M/T ratio $\bar{\beta}$ is very effective in reducing the series of joints mass.

3.3. Suitable Arm Structure for Direct Drive

The previous discussion assumed that all the joints were pivots. Now we can investigate how the series of joints mass can be reduced by replacing some of them by rotational joints. Then we find out what kinematic arm structures are suitable for direct drive. Consider the case as shown in Figure 3 where joint i is a rotation instead of a pivot. Then, only joints from 1 to $i-2$ are the loads for active joint i , because the axis of joint i penetrates the point mass $i-1$ and therefore the point mass $i-1$ is not a load for joint i . Thus the formula for \bar{M}_i , in this case, is:

$$\bar{M}_i = \bar{\beta} \sum_{j=0}^{i-2} [(i-j) + (i-j)^2 \bar{\alpha}] \bar{M}_j \quad (8)$$

Comparing this with eq. (6), we note that the load for active joint i is reduced. Moreover, the rotational joint i can be placed at any position

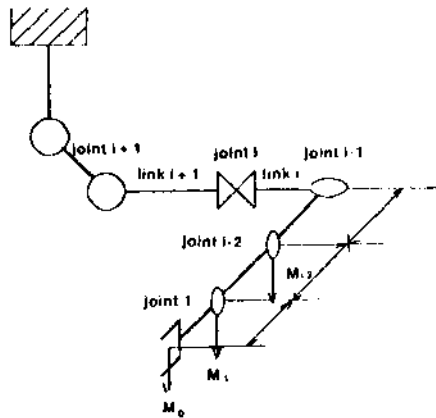


Figure 3: Rotational joint and its load

on links $i+1$ and i . If it is placed on joint $i+1$, joint i is not a load for joint $i+1$. In addition, the joint i can be a counter weight for joint $i+1$ if it is placed on the extension line of link $i+1$.

The adjacent joints of a rotational joint must be pivots, because two consecutive rotational joints are equivalent to one. Robot arms with 6 degrees of freedom can have at most three rotational joints, and there are 21 combinations in the arrangement of pivots and rotations. For each case the series of joint mass are computed. Table 2 lists mass of joints for several structures which contain at least 2 rotational joints. From this table we can conclude that the arm structure PR-P-RPR from the tip to the shoulder is the lightest and that R-P-R-P-P-R is as light as PR-PR-P-R.

4. Development of a Direct-Drive Manipulator

4.1. Investigation of Motors

The feasibility of developing a direct-drive manipulator depends on the performance of motors, which are the most important components in active joints and a key to reduce the M/T ratio of the active joint. We therefore investigate the ratio of mass of a motor to its peak torque (we call it M/T ratio) for DC torque motors in the market.

A permanent magnet with a high density of magnetic flux increases output torque and then reduces the M/T ratio. Recently, we saw a rapid progress in technology of rare-earth cobalt magnetic materials. The maximum magnetic energy product of rare earth cobalt is 19 to 30 MGOe, while those of conventional ferrite magnet and alnico magnet are about 3 MGOe, and 5.5 MGOe, respectively. In fact we compared rare-earth and alnico magnet motors in the market which have approximately the same shape and mass. Their peak torque for the rare-earth magnet motors is about twice as large as that of alnico motors, and therefore their

Table 2: Weights of motors for various kinematic structures

$\bar{\alpha} = 0.1 \quad \bar{\beta} = 0.5$

motor weight (tip) structure (base)	\bar{M}_1	\bar{M}_2	\bar{M}_3	\bar{M}_4	\bar{M}_5	\bar{M}_6	total
R-P-R-P-P-P	0*	1.20	1.20	4.24	9.08	18.60	30.41
R-P-R-P-P	0	1.20	2.61	2.61	9.27	19.78	30.40
R-P-P-P-P-P	0	1.20	2.03	6.08	6.08	20.08	30.22
R-P-P-P-P-R	0	1.20	2.61	6.66	12.34	2.80**	25.43
P-R-P-R-P-P	0.65	0.55	2.61	2.61	9.08	19.40	35.88
P-R-P-P-R-P	0.65	0.55	2.61	6.61	6.61	19.78	36.68
P-R-P-P-P-R	0.55	0.55	2.61	6.61	12.17	2.60	28.09
P-P-R-P-P-P	0.55	1.50	1.50	6.66	6.66	19.65	35.69
P-P-R-P-P-R	0.55	1.50	1.50	6.66	12.17	2.73	28.12
P-P-P-R-P-R	0.55	1.50	3.44	3.44	12.30	3.05	28.32
R-P-R-P-R-P	0	1.20	1.20	4.24	4.24	14.60	26.61
R-P-P-R-P-R	0	1.20	2.61	2.61	9.27	2.31	18.05
R-P-R-P-P-R	0	1.20	1.20	4.24	8.08	2.65	18.78
P-R-P-R-P-R	0.55	0.55	2.61	2.61	8.08	2.32	18.72

R: Rotational joint P: Pivotal joint

*) Since we assume that the external load is a point mass, the required torque for the rotational joint at the arm tip becomes zero.

**) The joint axis of the rotational joint at the base is assumed to be parallel to the direction of gravity. Then the gravity load becomes zero in this case.

MM/T ratio is reduced to 1/2. Also, we noticed that the larger-diameter motors have the smaller MM/T ratio. The extra large alnico magnet motor has a MM/T ratio as small as that of the medium size rare-earth motors.

- [3] Ojima, T., Tomizawa, D., et al.
Magnetic Properties of a New Type of Rare-Earth Cobalt Magnets.
IEEE *Transactions on Magnetics* MAG-13:1317-1319, 1977.

4.2. CMU DD Arm

A direct-drive manipulator (CMU DD Arm) was designed based on the above design theory, and is being developed at Carnegie-Mellon University [1]. For joints 1 through 3 we selected motors with rare-earth cobalt permanent magnet and for others alnico magnet motors with a large diameter. The basic design specifications of the CMU DD Arm are:

- Degrees of freedom: 6 (option 7)
- Joint structure: P-R-P-R-P-R
- Pivot: 180°
- Rotation: 360°
- Total length: 1.7 m
- Maximum load: 6 kg (4 kg)
- Maximum speed: 4 m/sec at the tip

5. Conclusion

The direct-drive manipulators have potentially a number of excellent features that the present electrically powered robotic manipulators do not have. However, the development of a practical manipulator requires powerful active joints with light weight. We analyzed required torques for a series of active joints by introducing the M/T ratio (ratio of mass to peak torque) of active joints. We also found that the suitable kinematic structures for the direct drive are P-R-P-R-P-R and R-P-R-P-P-R in the case of robots with 6 degrees of freedom.

The CMU direct-drive arm was designed according to these theoretical concepts also taking into account of motors presently available on the markets. However, the practical implementation requires investigation of another problem: heat dissipation. Each joint housing requires a light weight and strong structure with the property of good heat dissipation. This improvement in joint housings as well as more powerful motors will allow us to have robots of lighter weight and higher performance than currently available.

Acknowledgements

The authors wish to express their gratitude to Raj Reddy for his constant encouragement and enthusiasm on this project. Ed Kurts, Kasturi Rangan and Phil Spano provided assistance in designing and constructing the CMU arm.

References

- [1] Asada, H. and Kanade, T.
Design of Direct-Drive Mechanical Arms.
Technical Report CMU-R1-TR-81-1. Robotics Institute. CMU,
April, 1981.
- [2] Kano, T. Yanagida, H.
Rare Earth-Properties and Applications.
Gihodo Press, 1980.